



iMiniUSB PDF

- Plug & Play single trip data logger
- No special software required
- Pre-programmed to customer specifications
- Compact profile; weighs less than 14g
- Large memory capacity
- Long battery life
- 7 LED indicators
- Waterproof pouch



CERTIFICATIONS



21 CFR
Part 11



ISO
9001:2015

Product Specifications *(continued back)*

Logger	
Product Code	MS-ST-S-8 MS-ST-S-8-P (Pharma Compliant)
Memory Options	8K, 7928 readings
Program Interval	5 seconds to 17 hours
Time Accuracy	±1 hour per year
Sensors	Internal
Temperature Range	-40°C to +80°C (-40°F to +176°F)
Temperature Accuracy	±0.5°C (-40°C to -10°C), ±1°F (-40°F to +14°F); ±0.3°C (-10°C to +80°C), ±0.6°F (+14°F to +176°F)
Resolution	0.1 °C (0.1 °F)
Sensor Response Time	T90 of 5 minutes in moving air
LCD Operating Range	N/A
Alarm Thresholds	4 thresholds; 2 red LEDs, 2 blue LEDs
Alarm Configuration	HIGH HIGH, HIGH, LOW & LOW LOW
Bookmark	Yes, maximum 8
Preprogram Option	Factory programmed
Start Option	Push button
Auto Restart	N/A
Start Delay	Yes, 1 minute to 99 days
Stop Option	Yes, stop button (can be disabled)
Size	68x37x5mm (without sleeve); 81x52x5mm (with sleeve)
Weight	14 grams





iMiniUSB PDF

Product Specifications (continued from front)

Logger	
Case Material	Plastic sleeve
IP Rating	3.0V
Resolution	IP 65
Warranty	1 trip

Certification and software	
Calibration	3pt NIST traceable built into PDF (MS-ST-S-8-P only)
Certificates	ISO9001:2008, CE, RoHS
Battery Life	1 Year
Software	ConsolePlus
Default File Format	PDF, TXT, CVT & CSV
Data Export	TXT, CSV, CVT & PDF

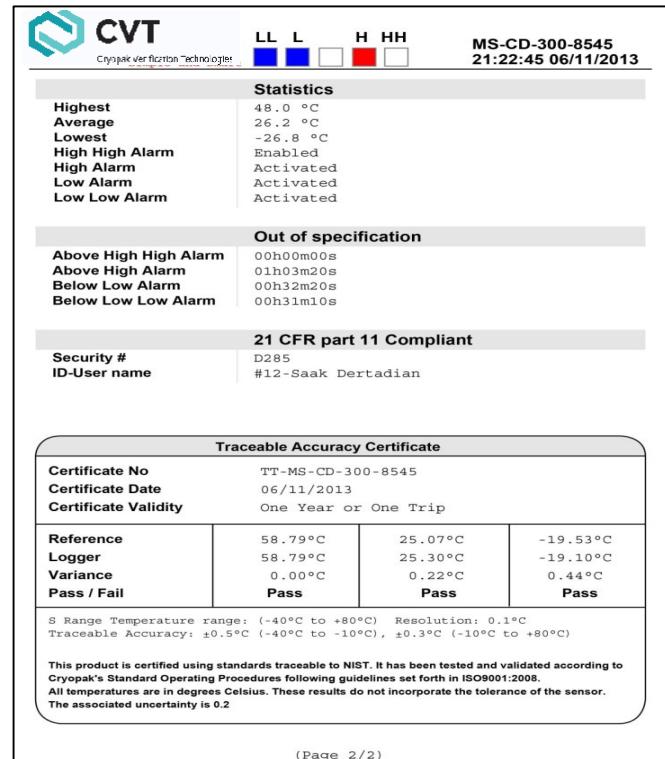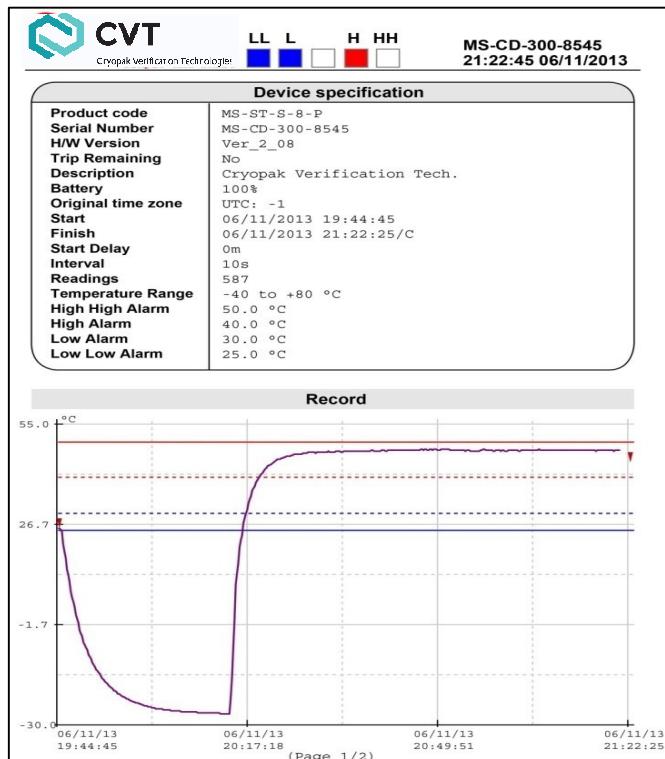

United States
Edison, NJ
1-888-827-3393

Canada
Anjou, QC
1-888-423-7251 (QC)
1-800-667-2532 (BC)

France
Maromme, France
+ 33 (0) 2 32 82 59 65

www.cryopakdigital.com